
Chain sling 2-leg with safety hook, grade 10

Product information

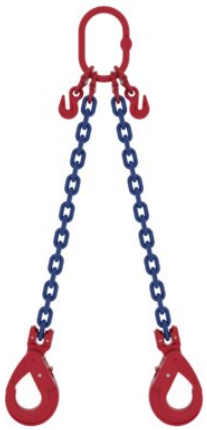

2-Leg chain sling assembly equipped with safety hooks and grab hooks. Alternative ends are also available, e.g. foundry hooks, shackles etc. Slings are equipped with a load plate.

... *Read more*

Material: Steel
Marking: CE-mark
Temperature range: -40 °C up to +200°C
Finish: Painted
Warning: Not to be heat-treated

Safety factor: 4:1
Grade: 10

© November 2026 - All Rights Reserved

Chain sling 2-leg with safety hook, grade 10

Technical data

Part code	Chain diameter mm	WLL ton	EWL m	Weight kg
240800600100160	6	2	1	6.46
240800600200160	6	2	2	9.46
240800600300160	6	2	3	12.46
240800600400160	6	2	4	15.46
240800600500160	6	2	5	18.46
240800600600160	6	2	6	21.46
240800600700160	6	2	7	24.46
240800600800160	6	2	8	27.46
240800800100160	8	3.5	1	6.46
240800800200160	8	3.5	2	9.46
240800800300160	8	3.5	3	12.46
240800800400160	8	3.5	4	15.46
240800800500160	8	3.5	5	18.46
240800800600160	8	3.5	6	21.46
240800800700160	8	3.5	7	24.46
240800800800160	8	3.5	8	27.46
240801000100160	10	5.6	1	10.76
240801000200160	10	5.6	2	15.36
240801000300160	10	5.6	3	19.96
240801000400160	10	5.6	4	24.56
240801000500160	10	5.6	5	29.16
240801000600160	10	5.6	6	33.76
240801000700160	10	5.6	7	38.36
240801000800160	10	5.6	8	42.96
240801300100160	13	9.5	1	20.9
240801300200160	13	9.5	2	28.7
240801300300160	13	9.5	3	36.5
240801300400160	13	9.5	4	44.3
240801300500160	13	9.5	5	52.1
240801300600160	13	9.5	6	59.9
240801300700160	13	9.5	7	67.7

© November 2026 - All Rights Reserved

Chain sling 2-leg with safety hook, grade 10

Technical data

Part code	Chain diameter mm	WLL ton	EWL m	Weight kg
240801300800160	13	9.5	8	75.5
240801600100160	16	14	1	36.92
240801600200160	16	14	2	48.52
240801600300160	16	14	3	60.12
240801600400160	16	14	4	71.72
240801600500160	16	14	5	83.32
240801600600160	16	14	6	94.92
240801600700160	16	14	7	106.52
240801600800160	16	14	8	118.12
240802000200160	20	22.4	2	70.1
240802000300160	20	22.4	3	88.3
240802000400160	20	22.4	4	106.5
240802000500160	20	22.4	5	124.7
240802000600160	20	22.4	6	142.9
240802000700160	20	22.4	7	161.1
240802000800160	20	22.4	8	179.3
240802200200160	22	26.5	2	105.7
240802200300160	22	26.5	3	127.7
240802200400160	22	26.5	4	149.7
240802200500160	22	26.5	5	171.7
240802200600160	22	26.5	6	193.7
240802200700160	22	26.5	7	215.7
240802200800160	22	26.5	8	237.7
240802600200160	26	37.1	2	141.4
240802600300160	26	37.1	3	172
240802600400160	26	37.1	4	202.6
240802600500160	26	37.1	5	233.2
240802600600160	26	37.1	6	263.8
240802600700160	26	37.1	7	294.4
240802600800160	26	37.1	8	325

© November 2026 - All Rights Reserved