


Electric winch MOTORBOX

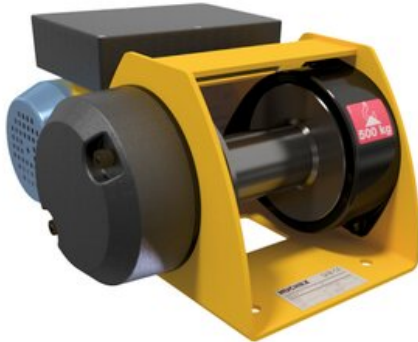

Product information

Electric winch designed for simple lifting and pulling operations in different applications, ideal for replacing a manual winch. Capacities from 150 to 500 kg.

Available in two versions: - Direct control (CD) only for use protected from the weather. - Low voltage control (BT) ensuring user protection against electrical risks.

Applications:

- Maintenance
- Industry
- Manoeuvring hatches, doors etc.

Technical properties:

- FEM class: 1Dm - ISO M1 – Occasional use.
- Mechanically welded steel drum with wide flanges for safe and sound fastening of the rope.
- Greased reducer with helical gears.
- Automatic lack of current brake.
- Single phase 230 V motor brake with permanent capacitor - 50 Hz lifting type. Class F. Protection IP 54.
- Limit switches included.
- Direct control (CD models) only for use protected from the weather. Low voltage control (BT models) ensuring user protection against electrical risks.
- 3 buttons pendant control (Up - Down- Emergency Stop), not removable (3m long control cable).

Options:

- Wire rope and hook Tarpaulin cover

Marking: According to standard, CE-marked

Temperature range: -10°C to +50°C

Finish: Painted.

Standard: EN 13157, EN 14492-1

Safety factor: 5:1

