


## Steel Wire Rope Verotop P

### Product information

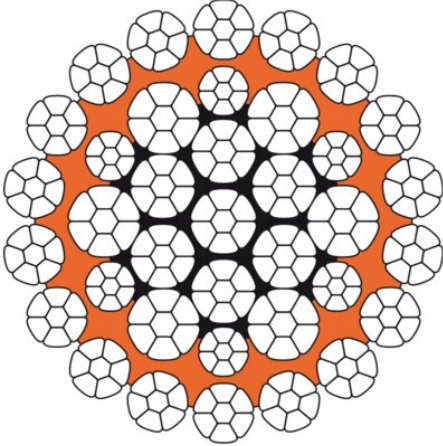

**Wire rope construction:** Verotop P is a rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.

#### Features:

- Very high breaking strength.
- Provides a very stable rope structure and achieves excellent bending fatigue results.
- Offers excellent crushing and very good abrasion resistance.
- Possesses perfect spooling behavior on multilayer drum.

**ISO 4309 Rope Category No:** All Diameters **RCN.23-3.**

[... Read more](#)

Offshore crane



Piling crane



Mobile port crane



**Marking:** According to standard

**Standard:** EN 12385-4

**Note:** verotop P can be used either with or without swivel.

**Fill factor:** 0.73

**RCN:** 23-3

**Tolerance Ø:** +2% to +4%

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104101606270149 | 16                  | 1,960                                 | Galvanized | zZ       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101606070149 | 16                  | 1,960                                 | Bright     | zZ       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101605070149 | 16                  | 1,960                                 | Bright     | sS       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101605270149 | 16                  | 1,960                                 | Galvanized | sS       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101603070149 | 16                  | 1,960                                 | Bright     | zS       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101603270149 | 16                  | 1,960                                 | Galvanized | zS       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101604070149 | 16                  | 1,960                                 | Bright     | sZ       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101604270149 | 16                  | 1,960                                 | Galvanized | sZ       | 241.7                     | 147                           | SupplierStandard | 125               |
| 104101606300149 | 16                  | 2,160                                 | Galvanized | zZ       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101606100149 | 16                  | 2,160                                 | Bright     | zZ       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101605100149 | 16                  | 2,160                                 | Bright     | sS       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101605300149 | 16                  | 2,160                                 | Galvanized | sS       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101603100149 | 16                  | 2,160                                 | Bright     | zS       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101603300149 | 16                  | 2,160                                 | Galvanized | zS       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101604100149 | 16                  | 2,160                                 | Bright     | sZ       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101604300149 | 16                  | 2,160                                 | Galvanized | sZ       | 252.7                     | 147                           | SupplierStandard | 125               |
| 104101706270149 | 17                  | 1,960                                 | Galvanized | zZ       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101706070149 | 17                  | 1,960                                 | Bright     | zZ       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101705070149 | 17                  | 1,960                                 | Bright     | sS       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101705270149 | 17                  | 1,960                                 | Galvanized | sS       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101703070149 | 17                  | 1,960                                 | Bright     | zS       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101703270149 | 17                  | 1,960                                 | Galvanized | zS       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101704070149 | 17                  | 1,960                                 | Bright     | sZ       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101704270149 | 17                  | 1,960                                 | Galvanized | sZ       | 272.8                     | 166                           | SupplierStandard | 141               |
| 104101706300149 | 17                  | 2,160                                 | Galvanized | zZ       | 285.3                     | 166                           | SupplierStandard | 141               |
| 104101706100149 | 17                  | 2,160                                 | Bright     | zZ       | 285.3                     | 166                           | SupplierStandard | 141               |
| 104101705100149 | 17                  | 2,160                                 | Bright     | sS       | 285.3                     | 166                           | SupplierStandard | 141               |
| 104101705300149 | 17                  | 2,160                                 | Galvanized | sS       | 285.3                     | 166                           | SupplierStandard | 141               |
| 104101703100149 | 17                  | 2,160                                 | Bright     | zS       | 285.3                     | 166                           | SupplierStandard | 141               |
| 104101703300149 | 17                  | 2,160                                 | Galvanized | zS       | 285.3                     | 166                           | SupplierStandard | 141               |
| 104101704100149 | 17                  | 2,160                                 | Bright     | sZ       | 285.3                     | 166                           | SupplierStandard | 141               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104101704300149 | 17                  | 2,160                                 | Galvanized | sZ       | 285.3                     | 166                           | SupplierStandard | 141               |
| 104101806270149 | 18                  | 1,960                                 | Galvanized | zZ       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101806070149 | 18                  | 1,960                                 | Bright     | zZ       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101805070149 | 18                  | 1,960                                 | Bright     | sS       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101805270149 | 18                  | 1,960                                 | Galvanized | sS       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101803070149 | 18                  | 1,960                                 | Bright     | zS       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101803270149 | 18                  | 1,960                                 | Galvanized | zS       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101804070149 | 18                  | 1,960                                 | Bright     | sZ       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101804270149 | 18                  | 1,960                                 | Galvanized | sZ       | 305.8                     | 186                           | SupplierStandard | 158               |
| 104101806300149 | 18                  | 2,160                                 | Galvanized | zZ       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101806100149 | 18                  | 2,160                                 | Bright     | zZ       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101805100149 | 18                  | 2,160                                 | Bright     | sS       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101805300149 | 18                  | 2,160                                 | Galvanized | sS       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101803100149 | 18                  | 2,160                                 | Bright     | zS       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101803300149 | 18                  | 2,160                                 | Galvanized | zS       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101804100149 | 18                  | 2,160                                 | Bright     | sZ       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101804300149 | 18                  | 2,160                                 | Galvanized | sZ       | 319.8                     | 186                           | SupplierStandard | 158               |
| 104101906270149 | 19                  | 1,960                                 | Galvanized | zZ       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101906070149 | 19                  | 1,960                                 | Bright     | zZ       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101905070149 | 19                  | 1,960                                 | Bright     | sS       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101905270149 | 19                  | 1,960                                 | Galvanized | sS       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101903070149 | 19                  | 1,960                                 | Bright     | zS       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101903270149 | 19                  | 1,960                                 | Galvanized | zS       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101904070149 | 19                  | 1,960                                 | Bright     | sZ       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101904270149 | 19                  | 1,960                                 | Galvanized | sZ       | 340.8                     | 207                           | SupplierStandard | 176               |
| 104101906300149 | 19                  | 2,160                                 | Galvanized | zZ       | 356.3                     | 207                           | SupplierStandard | 176               |
| 104101906100149 | 19                  | 2,160                                 | Bright     | zZ       | 356.3                     | 207                           | SupplierStandard | 176               |
| 104101905100149 | 19                  | 2,160                                 | Bright     | sS       | 356.3                     | 207                           | SupplierStandard | 176               |
| 104101905300149 | 19                  | 2,160                                 | Galvanized | sS       | 356.3                     | 207                           | SupplierStandard | 176               |
| 104101903100149 | 19                  | 2,160                                 | Bright     | zS       | 356.3                     | 207                           | SupplierStandard | 176               |
| 104101903300149 | 19                  | 2,160                                 | Galvanized | zS       | 356.3                     | 207                           | SupplierStandard | 176               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104101904100149 | 19                  | 2,160                                 | Bright     | sZ       | 356.3                     | 207                           | SupplierStandard | 176               |
| 104101904300149 | 19                  | 2,160                                 | Galvanized | sZ       | 356.3                     | 207                           | SupplierStandard | 176               |
| 104102006270149 | 20                  | 1,960                                 | Galvanized | zZ       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102006070149 | 20                  | 1,960                                 | Bright     | zZ       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102005070149 | 20                  | 1,960                                 | Bright     | sS       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102005270149 | 20                  | 1,960                                 | Galvanized | sS       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102003070149 | 20                  | 1,960                                 | Bright     | zS       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102003270149 | 20                  | 1,960                                 | Galvanized | zS       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102004070149 | 20                  | 1,960                                 | Bright     | sZ       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102004270149 | 20                  | 1,960                                 | Galvanized | sZ       | 377.6                     | 229                           | SupplierStandard | 195               |
| 104102006300149 | 20                  | 2,160                                 | Galvanized | zZ       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102006100149 | 20                  | 2,160                                 | Bright     | zZ       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102005100149 | 20                  | 2,160                                 | Bright     | sS       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102005300149 | 20                  | 2,160                                 | Galvanized | sS       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102003100149 | 20                  | 2,160                                 | Bright     | zS       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102003300149 | 20                  | 2,160                                 | Galvanized | zS       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102004100149 | 20                  | 2,160                                 | Bright     | sZ       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102004300149 | 20                  | 2,160                                 | Galvanized | sZ       | 394.8                     | 229                           | SupplierStandard | 195               |
| 104102106270149 | 21                  | 1,960                                 | Galvanized | zZ       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102106070149 | 21                  | 1,960                                 | Bright     | zZ       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102105070149 | 21                  | 1,960                                 | Bright     | sS       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102105270149 | 21                  | 1,960                                 | Galvanized | sS       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102103070149 | 21                  | 1,960                                 | Bright     | zS       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102103270149 | 21                  | 1,960                                 | Galvanized | zS       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102104070149 | 21                  | 1,960                                 | Bright     | sZ       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102104270149 | 21                  | 1,960                                 | Galvanized | sZ       | 416.3                     | 253                           | SupplierStandard | 215               |
| 104102106300149 | 21                  | 2,160                                 | Galvanized | zZ       | 435.3                     | 253                           | SupplierStandard | 215               |
| 104102106100149 | 21                  | 2,160                                 | Bright     | zZ       | 435.3                     | 253                           | SupplierStandard | 215               |
| 104102105100149 | 21                  | 2,160                                 | Bright     | sS       | 435.3                     | 253                           | SupplierStandard | 215               |
| 104102105300149 | 21                  | 2,160                                 | Galvanized | sS       | 435.3                     | 253                           | SupplierStandard | 215               |
| 104102103100149 | 21                  | 2,160                                 | Bright     | zS       | 435.3                     | 253                           | SupplierStandard | 215               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104102103300149 | 21                  | 2,160                                 | Galvanized | zS       | 435.3                     | 253                           | SupplierStandard | 215               |
| 104102104100149 | 21                  | 2,160                                 | Bright     | sZ       | 435.3                     | 253                           | SupplierStandard | 215               |
| 104102104300149 | 21                  | 2,160                                 | Galvanized | sZ       | 435.3                     | 253                           | SupplierStandard | 215               |
| 104102206270149 | 22                  | 1,960                                 | Galvanized | zZ       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102206070149 | 22                  | 1,960                                 | Bright     | zZ       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102205070149 | 22                  | 1,960                                 | Bright     | sS       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102205270149 | 22                  | 1,960                                 | Galvanized | sS       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102203070149 | 22                  | 1,960                                 | Bright     | zS       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102203270149 | 22                  | 1,960                                 | Galvanized | zS       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102204070149 | 22                  | 1,960                                 | Bright     | sZ       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102204270149 | 22                  | 1,960                                 | Galvanized | sZ       | 456.9                     | 277                           | SupplierStandard | 236               |
| 104102206300149 | 22                  | 2,160                                 | Galvanized | zZ       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102206100149 | 22                  | 2,160                                 | Bright     | zZ       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102205100149 | 22                  | 2,160                                 | Bright     | sS       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102205300149 | 22                  | 2,160                                 | Galvanized | sS       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102203100149 | 22                  | 2,160                                 | Bright     | zS       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102203300149 | 22                  | 2,160                                 | Galvanized | zS       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102204100149 | 22                  | 2,160                                 | Bright     | sZ       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102204300149 | 22                  | 2,160                                 | Galvanized | sZ       | 477.7                     | 277                           | SupplierStandard | 236               |
| 104102246270149 | 22.4                | 1,960                                 | Galvanized | zZ       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102246070149 | 22.4                | 1,960                                 | Bright     | zZ       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102245070149 | 22.4                | 1,960                                 | Bright     | sS       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102245270149 | 22.4                | 1,960                                 | Galvanized | sS       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102243070149 | 22.4                | 1,960                                 | Bright     | zS       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102243270149 | 22.4                | 1,960                                 | Galvanized | zS       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102244070149 | 22.4                | 1,960                                 | Bright     | sZ       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102244270149 | 22.4                | 1,960                                 | Galvanized | sZ       | 473.6                     | 283                           | SupplierStandard | 240               |
| 104102246300149 | 22.4                | 2,160                                 | Galvanized | zZ       | 495.3                     | 283                           | SupplierStandard | 240               |
| 104102246100149 | 22.4                | 2,160                                 | Bright     | zZ       | 495.3                     | 283                           | SupplierStandard | 240               |
| 104102245100149 | 22.4                | 2,160                                 | Bright     | sS       | 495.3                     | 283                           | SupplierStandard | 240               |
| 104102245300149 | 22.4                | 2,160                                 | Galvanized | sS       | 495.3                     | 283                           | SupplierStandard | 240               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104102243100149 | 22.4                | 2,160                                 | Bright     | zS       | 495.3                     | 283                           | SupplierStandard | 240               |
| 104102243300149 | 22.4                | 2,160                                 | Galvanized | zS       | 495.3                     | 283                           | SupplierStandard | 240               |
| 104102244100149 | 22.4                | 2,160                                 | Bright     | sZ       | 495.3                     | 283                           | SupplierStandard | 240               |
| 104102244300149 | 22.4                | 2,160                                 | Galvanized | sZ       | 495.3                     | 283                           | SupplierStandard | 240               |
| 104102306270149 | 23                  | 1,960                                 | Galvanized | zZ       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102306070149 | 23                  | 1,960                                 | Bright     | zZ       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102305070149 | 23                  | 1,960                                 | Bright     | sS       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102305270149 | 23                  | 1,960                                 | Galvanized | sS       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102303070149 | 23                  | 1,960                                 | Bright     | zS       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102303270149 | 23                  | 1,960                                 | Galvanized | zS       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102304070149 | 23                  | 1,960                                 | Bright     | sZ       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102304270149 | 23                  | 1,960                                 | Galvanized | sZ       | 499.3                     | 303                           | SupplierStandard | 258               |
| 104102306300149 | 23                  | 2,160                                 | Galvanized | zZ       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102306100149 | 23                  | 2,160                                 | Bright     | zZ       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102305100149 | 23                  | 2,160                                 | Bright     | sS       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102305300149 | 23                  | 2,160                                 | Galvanized | sS       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102303100149 | 23                  | 2,160                                 | Bright     | zS       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102303300149 | 23                  | 2,160                                 | Galvanized | zS       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102304100149 | 23                  | 2,160                                 | Bright     | sZ       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102304300149 | 23                  | 2,160                                 | Galvanized | sZ       | 522.2                     | 303                           | SupplierStandard | 258               |
| 104102406270149 | 24                  | 1,960                                 | Galvanized | zZ       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102406070149 | 24                  | 1,960                                 | Bright     | zZ       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102405070149 | 24                  | 1,960                                 | Bright     | sS       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102405270149 | 24                  | 1,960                                 | Galvanized | sS       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102403070149 | 24                  | 1,960                                 | Bright     | zS       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102403270149 | 24                  | 1,960                                 | Galvanized | zS       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102404070149 | 24                  | 1,960                                 | Bright     | sZ       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102404270149 | 24                  | 1,960                                 | Galvanized | sZ       | 543.7                     | 330                           | SupplierStandard | 281               |
| 104102406300149 | 24                  | 2,160                                 | Galvanized | zZ       | 568.6                     | 330                           | SupplierStandard | 281               |
| 104102406100149 | 24                  | 2,160                                 | Bright     | zZ       | 568.6                     | 330                           | SupplierStandard | 281               |
| 104102405100149 | 24                  | 2,160                                 | Bright     | sS       | 568.6                     | 330                           | SupplierStandard | 281               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104102405300149 | 24                  | 2,160                                 | Galvanized | sS       | 568.6                     | 330                           | SupplierStandard | 281               |
| 104102403100149 | 24                  | 2,160                                 | Bright     | zS       | 568.6                     | 330                           | SupplierStandard | 281               |
| 104102403300149 | 24                  | 2,160                                 | Galvanized | zS       | 568.6                     | 330                           | SupplierStandard | 281               |
| 104102404100149 | 24                  | 2,160                                 | Bright     | sZ       | 568.6                     | 330                           | SupplierStandard | 281               |
| 104102404300149 | 24                  | 2,160                                 | Galvanized | sZ       | 568.6                     | 330                           | SupplierStandard | 281               |
| 104102506270149 | 25                  | 1,960                                 | Galvanized | zZ       | 590                       | 358                           | SupplierStandard | 305               |
| 104102506070149 | 25                  | 1,960                                 | Bright     | zZ       | 590                       | 358                           | SupplierStandard | 305               |
| 104102505070149 | 25                  | 1,960                                 | Bright     | sS       | 590                       | 358                           | SupplierStandard | 305               |
| 104102505270149 | 25                  | 1,960                                 | Galvanized | sS       | 590                       | 358                           | SupplierStandard | 305               |
| 104102503070149 | 25                  | 1,960                                 | Bright     | zS       | 590                       | 358                           | SupplierStandard | 305               |
| 104102503270149 | 25                  | 1,960                                 | Galvanized | zS       | 590                       | 358                           | SupplierStandard | 305               |
| 104102504070149 | 25                  | 1,960                                 | Bright     | sZ       | 590                       | 358                           | SupplierStandard | 305               |
| 104102504270149 | 25                  | 1,960                                 | Galvanized | sZ       | 590                       | 358                           | SupplierStandard | 305               |
| 104102506300149 | 25                  | 2,160                                 | Galvanized | zZ       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102506100149 | 25                  | 2,160                                 | Bright     | zZ       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102505100149 | 25                  | 2,160                                 | Bright     | sS       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102505300149 | 25                  | 2,160                                 | Galvanized | sS       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102503100149 | 25                  | 2,160                                 | Bright     | zS       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102503300149 | 25                  | 2,160                                 | Galvanized | zS       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102504100149 | 25                  | 2,160                                 | Bright     | sZ       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102504300149 | 25                  | 2,160                                 | Galvanized | sZ       | 616.9                     | 358                           | SupplierStandard | 305               |
| 104102546270149 | 25.4                | 1,960                                 | Galvanized | zZ       | 609                       | 370                           | SupplierStandard | 314               |
| 104102546070149 | 25.4                | 1,960                                 | Bright     | zZ       | 609                       | 370                           | SupplierStandard | 314               |
| 104102545070149 | 25.4                | 1,960                                 | Bright     | sS       | 609                       | 370                           | SupplierStandard | 314               |
| 104102545270149 | 25.4                | 1,960                                 | Galvanized | sS       | 609                       | 370                           | SupplierStandard | 314               |
| 104102543070149 | 25.4                | 1,960                                 | Bright     | zS       | 609                       | 370                           | SupplierStandard | 314               |
| 104102543270149 | 25.4                | 1,960                                 | Galvanized | zS       | 609                       | 370                           | SupplierStandard | 314               |
| 104102544070149 | 25.4                | 1,960                                 | Bright     | sZ       | 609                       | 370                           | SupplierStandard | 314               |
| 104102544270149 | 25.4                | 1,960                                 | Galvanized | sZ       | 609                       | 370                           | SupplierStandard | 314               |
| 104102546300149 | 25.4                | 2,160                                 | Galvanized | zZ       | 636.8                     | 370                           | SupplierStandard | 314               |
| 104102546100149 | 25.4                | 2,160                                 | Bright     | zZ       | 636.8                     | 370                           | SupplierStandard | 314               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104102545100149 | 25.4                | 2,160                                 | Bright     | sS       | 636.8                     | 370                           | SupplierStandard | 314               |
| 104102545300149 | 25.4                | 2,160                                 | Galvanized | sS       | 636.8                     | 370                           | SupplierStandard | 314               |
| 104102543100149 | 25.4                | 2,160                                 | Bright     | zS       | 636.8                     | 370                           | SupplierStandard | 314               |
| 104102543300149 | 25.4                | 2,160                                 | Galvanized | zS       | 636.8                     | 370                           | SupplierStandard | 314               |
| 104102544100149 | 25.4                | 2,160                                 | Bright     | sZ       | 636.8                     | 370                           | SupplierStandard | 314               |
| 104102544300149 | 25.4                | 2,160                                 | Galvanized | sZ       | 636.8                     | 370                           | SupplierStandard | 314               |
| 104102606270149 | 26                  | 1,960                                 | Galvanized | zZ       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102606070149 | 26                  | 1,960                                 | Bright     | zZ       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102605070149 | 26                  | 1,960                                 | Bright     | sS       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102605270149 | 26                  | 1,960                                 | Galvanized | sS       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102603070149 | 26                  | 1,960                                 | Bright     | zS       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102603270149 | 26                  | 1,960                                 | Galvanized | zS       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102604070149 | 26                  | 1,960                                 | Bright     | sZ       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102604270149 | 26                  | 1,960                                 | Galvanized | sZ       | 638.1                     | 388                           | SupplierStandard | 329               |
| 104102606300149 | 26                  | 2,160                                 | Galvanized | zZ       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102606100149 | 26                  | 2,160                                 | Bright     | zZ       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102605100149 | 26                  | 2,160                                 | Bright     | sS       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102605300149 | 26                  | 2,160                                 | Galvanized | sS       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102603100149 | 26                  | 2,160                                 | Bright     | zS       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102603300149 | 26                  | 2,160                                 | Galvanized | zS       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102604100149 | 26                  | 2,160                                 | Bright     | sZ       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102604300149 | 26                  | 2,160                                 | Galvanized | sZ       | 667.3                     | 388                           | SupplierStandard | 329               |
| 104102706270149 | 27                  | 1,960                                 | Galvanized | zZ       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102706070149 | 27                  | 1,960                                 | Bright     | zZ       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102705070149 | 27                  | 1,960                                 | Bright     | sS       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102705270149 | 27                  | 1,960                                 | Galvanized | sS       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102703070149 | 27                  | 1,960                                 | Bright     | zS       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102703270149 | 27                  | 1,960                                 | Galvanized | zS       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102704070149 | 27                  | 1,960                                 | Bright     | sZ       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102704270149 | 27                  | 1,960                                 | Galvanized | sZ       | 688.1                     | 418                           | SupplierStandard | 355               |
| 104102706300149 | 27                  | 2,160                                 | Galvanized | zZ       | 719.6                     | 418                           | SupplierStandard | 355               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104102706100149 | 27                  | 2,160                                 | Bright     | zZ       | 719.6                     | 418                           | SupplierStandard | 355               |
| 104102705100149 | 27                  | 2,160                                 | Bright     | sS       | 719.6                     | 418                           | SupplierStandard | 355               |
| 104102705300149 | 27                  | 2,160                                 | Galvanized | sS       | 719.6                     | 418                           | SupplierStandard | 355               |
| 104102703100149 | 27                  | 2,160                                 | Bright     | zS       | 719.6                     | 418                           | SupplierStandard | 355               |
| 104102703300149 | 27                  | 2,160                                 | Galvanized | zS       | 719.6                     | 418                           | SupplierStandard | 355               |
| 104102704100149 | 27                  | 2,160                                 | Bright     | sZ       | 719.6                     | 418                           | SupplierStandard | 355               |
| 104102704300149 | 27                  | 2,160                                 | Galvanized | sZ       | 719.6                     | 418                           | SupplierStandard | 355               |
| 104102806270149 | 28                  | 1,960                                 | Galvanized | zZ       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102806070149 | 28                  | 1,960                                 | Bright     | zZ       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102805070149 | 28                  | 1,960                                 | Bright     | sS       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102805270149 | 28                  | 1,960                                 | Galvanized | sS       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102803070149 | 28                  | 1,960                                 | Bright     | zS       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102803270149 | 28                  | 1,960                                 | Galvanized | zS       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102804070149 | 28                  | 1,960                                 | Bright     | sZ       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102804270149 | 28                  | 1,960                                 | Galvanized | sZ       | 740.1                     | 449                           | SupplierStandard | 382               |
| 104102806300149 | 28                  | 2,160                                 | Galvanized | zZ       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102806100149 | 28                  | 2,160                                 | Bright     | zZ       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102805100149 | 28                  | 2,160                                 | Bright     | sS       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102805300149 | 28                  | 2,160                                 | Galvanized | sS       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102803100149 | 28                  | 2,160                                 | Bright     | zS       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102803300149 | 28                  | 2,160                                 | Galvanized | zS       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102804100149 | 28                  | 2,160                                 | Bright     | sZ       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102804300149 | 28                  | 2,160                                 | Galvanized | sZ       | 773.9                     | 449                           | SupplierStandard | 382               |
| 104102866270149 | 28.6                | 1,960                                 | Galvanized | zZ       | 772.1                     | 469                           | SupplierStandard | 399               |
| 104102866070149 | 28.6                | 1,960                                 | Bright     | zZ       | 772.1                     | 469                           | SupplierStandard | 399               |
| 104102865070149 | 28.6                | 1,960                                 | Bright     | sS       | 772.1                     | 469                           | SupplierStandard | 399               |
| 104102865270149 | 28.6                | 1,960                                 | Galvanized | sS       | 772.1                     | 469                           | SupplierStandard | 399               |
| 104102863070149 | 28.6                | 1,960                                 | Bright     | zS       | 772.1                     | 469                           | SupplierStandard | 399               |
| 104102863270149 | 28.6                | 1,960                                 | Galvanized | zS       | 772.1                     | 469                           | SupplierStandard | 399               |
| 104102864070149 | 28.6                | 1,960                                 | Bright     | sZ       | 772.1                     | 469                           | SupplierStandard | 399               |
| 104102864270149 | 28.6                | 1,960                                 | Galvanized | sZ       | 772.1                     | 469                           | SupplierStandard | 399               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104102866300149 | 28.6                | 2,160                                 | Galvanized | zZ       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102866100149 | 28.6                | 2,160                                 | Bright     | zZ       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102865100149 | 28.6                | 2,160                                 | Bright     | sS       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102865300149 | 28.6                | 2,160                                 | Galvanized | sS       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102863100149 | 28.6                | 2,160                                 | Bright     | zS       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102863300149 | 28.6                | 2,160                                 | Galvanized | zS       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102864100149 | 28.6                | 2,160                                 | Bright     | sZ       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102864300149 | 28.6                | 2,160                                 | Galvanized | sZ       | 807.4                     | 469                           | SupplierStandard | 399               |
| 104102906270149 | 29                  | 1,960                                 | Galvanized | zZ       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102906070149 | 29                  | 1,960                                 | Bright     | zZ       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102905070149 | 29                  | 1,960                                 | Bright     | sS       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102905270149 | 29                  | 1,960                                 | Galvanized | sS       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102903070149 | 29                  | 1,960                                 | Bright     | zS       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102903270149 | 29                  | 1,960                                 | Galvanized | zS       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102904070149 | 29                  | 1,960                                 | Bright     | sZ       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102904270149 | 29                  | 1,960                                 | Galvanized | sZ       | 793.9                     | 482                           | SupplierStandard | 409.9             |
| 104102906300149 | 29                  | 2,160                                 | Galvanized | zZ       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104102906100149 | 29                  | 2,160                                 | Bright     | zZ       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104102905100149 | 29                  | 2,160                                 | Bright     | sS       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104102905300149 | 29                  | 2,160                                 | Galvanized | sS       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104102903100149 | 29                  | 2,160                                 | Bright     | zS       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104102903300149 | 29                  | 2,160                                 | Galvanized | zS       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104102904100149 | 29                  | 2,160                                 | Bright     | sZ       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104102904300149 | 29                  | 2,160                                 | Galvanized | sZ       | 830.1                     | 482                           | SupplierStandard | 409.9             |
| 104103006270149 | 30                  | 1,960                                 | Galvanized | zZ       | 849.6                     | 516                           | SupplierStandard | 439               |
| 104103006070149 | 30                  | 1,960                                 | Bright     | zZ       | 849.6                     | 516                           | SupplierStandard | 439               |
| 104103005070149 | 30                  | 1,960                                 | Bright     | sS       | 849.6                     | 516                           | SupplierStandard | 439               |
| 104103005270149 | 30                  | 1,960                                 | Galvanized | sS       | 849.6                     | 516                           | SupplierStandard | 439               |
| 104103003070149 | 30                  | 1,960                                 | Bright     | zS       | 849.6                     | 516                           | SupplierStandard | 439               |
| 104103003270149 | 30                  | 1,960                                 | Galvanized | zS       | 849.6                     | 516                           | SupplierStandard | 439               |
| 104103004070149 | 30                  | 1,960                                 | Bright     | sZ       | 849.6                     | 516                           | SupplierStandard | 439               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104103004270149 | 30                  | 1,960                                 | Galvanized | sZ       | 849.6                     | 516                           | SupplierStandard | 439               |
| 104103006300149 | 30                  | 2,160                                 | Galvanized | zZ       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103006100149 | 30                  | 2,160                                 | Bright     | zZ       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103005100149 | 30                  | 2,160                                 | Bright     | sS       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103005300149 | 30                  | 2,160                                 | Galvanized | sS       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103003100149 | 30                  | 2,160                                 | Bright     | zS       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103003300149 | 30                  | 2,160                                 | Galvanized | zS       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103004100149 | 30                  | 2,160                                 | Bright     | sZ       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103004300149 | 30                  | 2,160                                 | Galvanized | sZ       | 888.4                     | 516                           | SupplierStandard | 439               |
| 104103106270149 | 31                  | 1,960                                 | Galvanized | zZ       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103106070149 | 31                  | 1,960                                 | Bright     | zZ       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103105070149 | 31                  | 1,960                                 | Bright     | sS       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103105270149 | 31                  | 1,960                                 | Galvanized | sS       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103103070149 | 31                  | 1,960                                 | Bright     | zS       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103103270149 | 31                  | 1,960                                 | Galvanized | zS       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103104070149 | 31                  | 1,960                                 | Bright     | sZ       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103104270149 | 31                  | 1,960                                 | Galvanized | sZ       | 907.1                     | 551                           | SupplierStandard | 468               |
| 104103106300149 | 31                  | 2,160                                 | Galvanized | zZ       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103106100149 | 31                  | 2,160                                 | Bright     | zZ       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103105100149 | 31                  | 2,160                                 | Bright     | sS       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103105300149 | 31                  | 2,160                                 | Galvanized | sS       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103103100149 | 31                  | 2,160                                 | Bright     | zS       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103103300149 | 31                  | 2,160                                 | Galvanized | zS       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103104100149 | 31                  | 2,160                                 | Bright     | sZ       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103104300149 | 31                  | 2,160                                 | Galvanized | sZ       | 948.6                     | 551                           | SupplierStandard | 468               |
| 104103206270149 | 32                  | 1,960                                 | Galvanized | zZ       | 966.6                     | 587                           | SupplierStandard | 499               |
| 104103206070149 | 32                  | 1,960                                 | Bright     | zZ       | 966.6                     | 587                           | SupplierStandard | 499               |
| 104103205070149 | 32                  | 1,960                                 | Bright     | sS       | 966.6                     | 587                           | SupplierStandard | 499               |
| 104103205270149 | 32                  | 1,960                                 | Galvanized | sS       | 966.6                     | 587                           | SupplierStandard | 499               |
| 104103203070149 | 32                  | 1,960                                 | Bright     | zS       | 966.6                     | 587                           | SupplierStandard | 499               |
| 104103203270149 | 32                  | 1,960                                 | Galvanized | zS       | 966.6                     | 587                           | SupplierStandard | 499               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104103206300149 | 32                  | 2,160                                 | Galvanized | zZ       | 1,011                     | 587                           | SupplierStandard | 499               |
| 104103206100149 | 32                  | 2,160                                 | Bright     | zZ       | 1,011                     | 587                           | SupplierStandard | 499               |
| 104103205100149 | 32                  | 2,160                                 | Bright     | sS       | 1,011                     | 587                           | SupplierStandard | 499               |
| 104103205300149 | 32                  | 2,160                                 | Galvanized | sS       | 1,011                     | 587                           | SupplierStandard | 499               |
| 104103203100149 | 32                  | 2,160                                 | Bright     | zS       | 1,011                     | 587                           | SupplierStandard | 499               |
| 104103203300149 | 32                  | 2,160                                 | Galvanized | zS       | 1,011                     | 587                           | SupplierStandard | 499               |
| 104103306270149 | 33                  | 1,960                                 | Galvanized | zZ       | 1,028                     | 624                           | SupplierStandard | 531               |
| 104103306070149 | 33                  | 1,960                                 | Bright     | zZ       | 1,028                     | 624                           | SupplierStandard | 531               |
| 104103305070149 | 33                  | 1,960                                 | Bright     | sS       | 1,028                     | 624                           | SupplierStandard | 531               |
| 104103305270149 | 33                  | 1,960                                 | Galvanized | sS       | 1,028                     | 624                           | SupplierStandard | 531               |
| 104103303070149 | 33                  | 1,960                                 | Bright     | zS       | 1,028                     | 624                           | SupplierStandard | 531               |
| 104103303270149 | 33                  | 1,960                                 | Galvanized | zS       | 1,028                     | 624                           | SupplierStandard | 531               |
| 104103306300149 | 33                  | 2,160                                 | Galvanized | zZ       | 1,075                     | 624                           | SupplierStandard | 531               |
| 104103306100149 | 33                  | 2,160                                 | Bright     | zZ       | 1,075                     | 624                           | SupplierStandard | 531               |
| 104103305100149 | 33                  | 2,160                                 | Bright     | sS       | 1,075                     | 624                           | SupplierStandard | 531               |
| 104103305300149 | 33                  | 2,160                                 | Galvanized | sS       | 1,075                     | 624                           | SupplierStandard | 531               |
| 104103303100149 | 33                  | 2,160                                 | Bright     | zS       | 1,075                     | 624                           | SupplierStandard | 531               |
| 104103303300149 | 33                  | 2,160                                 | Galvanized | zS       | 1,075                     | 624                           | SupplierStandard | 531               |
| 104103406270149 | 34                  | 1,960                                 | Galvanized | zZ       | 1,091                     | 663                           | SupplierStandard | 563               |
| 104103406070149 | 34                  | 1,960                                 | Bright     | zZ       | 1,091                     | 663                           | SupplierStandard | 563               |
| 104103405070149 | 34                  | 1,960                                 | Bright     | sS       | 1,091                     | 663                           | SupplierStandard | 563               |
| 104103405270149 | 34                  | 1,960                                 | Galvanized | sS       | 1,091                     | 663                           | SupplierStandard | 563               |
| 104103403070149 | 34                  | 1,960                                 | Bright     | zS       | 1,091                     | 663                           | SupplierStandard | 563               |
| 104103403270149 | 34                  | 1,960                                 | Galvanized | zS       | 1,091                     | 663                           | SupplierStandard | 563               |
| 104103406300149 | 34                  | 2,160                                 | Galvanized | zZ       | 1,141                     | 663                           | SupplierStandard | 563               |
| 104103406100149 | 34                  | 2,160                                 | Bright     | zZ       | 1,141                     | 663                           | SupplierStandard | 563               |
| 104103405100149 | 34                  | 2,160                                 | Bright     | sS       | 1,141                     | 663                           | SupplierStandard | 563               |
| 104103405300149 | 34                  | 2,160                                 | Galvanized | sS       | 1,141                     | 663                           | SupplierStandard | 563               |
| 104103403100149 | 34                  | 2,160                                 | Bright     | zS       | 1,141                     | 663                           | SupplierStandard | 563               |
| 104103403300149 | 34                  | 2,160                                 | Galvanized | zS       | 1,141                     | 663                           | SupplierStandard | 563               |
| 104103506270149 | 35                  | 1,960                                 | Galvanized | zZ       | 1,156                     | 702                           | SupplierStandard | 597               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104103506070149 | 35                  | 1,960                                 | Bright     | zZ       | 1,156                     | 702                           | SupplierStandard | 597               |
| 104103505070149 | 35                  | 1,960                                 | Bright     | sS       | 1,156                     | 702                           | SupplierStandard | 597               |
| 104103505270149 | 35                  | 1,960                                 | Galvanized | sS       | 1,156                     | 702                           | SupplierStandard | 597               |
| 104103503070149 | 35                  | 1,960                                 | Bright     | zS       | 1,156                     | 702                           | SupplierStandard | 597               |
| 104103503270149 | 35                  | 1,960                                 | Galvanized | zS       | 1,156                     | 702                           | SupplierStandard | 597               |
| 104103506300149 | 35                  | 2,160                                 | Galvanized | zZ       | 1,209                     | 702                           | SupplierStandard | 597               |
| 104103506100149 | 35                  | 2,160                                 | Bright     | zZ       | 1,209                     | 702                           | SupplierStandard | 597               |
| 104103505100149 | 35                  | 2,160                                 | Bright     | sS       | 1,209                     | 702                           | SupplierStandard | 597               |
| 104103505300149 | 35                  | 2,160                                 | Galvanized | sS       | 1,209                     | 702                           | SupplierStandard | 597               |
| 104103503100149 | 35                  | 2,160                                 | Bright     | zS       | 1,209                     | 702                           | SupplierStandard | 597               |
| 104103503300149 | 35                  | 2,160                                 | Galvanized | zS       | 1,209                     | 702                           | SupplierStandard | 597               |
| 104103606270149 | 36                  | 1,960                                 | Galvanized | zZ       | 1,223                     | 743                           | SupplierStandard | 632               |
| 104103606070149 | 36                  | 1,960                                 | Bright     | zZ       | 1,223                     | 743                           | SupplierStandard | 632               |
| 104103605070149 | 36                  | 1,960                                 | Bright     | sS       | 1,223                     | 743                           | SupplierStandard | 632               |
| 104103605270149 | 36                  | 1,960                                 | Galvanized | sS       | 1,223                     | 743                           | SupplierStandard | 632               |
| 104103603070149 | 36                  | 1,960                                 | Bright     | zS       | 1,223                     | 743                           | SupplierStandard | 632               |
| 104103603270149 | 36                  | 1,960                                 | Galvanized | zS       | 1,223                     | 743                           | SupplierStandard | 632               |
| 104103606300149 | 36                  | 2,160                                 | Galvanized | zZ       | 1,279                     | 743                           | SupplierStandard | 632               |
| 104103606100149 | 36                  | 2,160                                 | Bright     | zZ       | 1,279                     | 743                           | SupplierStandard | 632               |
| 104103605100149 | 36                  | 2,160                                 | Bright     | sS       | 1,279                     | 743                           | SupplierStandard | 632               |
| 104103605300149 | 36                  | 2,160                                 | Galvanized | sS       | 1,279                     | 743                           | SupplierStandard | 632               |
| 104103603100149 | 36                  | 2,160                                 | Bright     | zS       | 1,279                     | 743                           | SupplierStandard | 632               |
| 104103603300149 | 36                  | 2,160                                 | Galvanized | zS       | 1,279                     | 743                           | SupplierStandard | 632               |
| 104103806270149 | 38                  | 1,960                                 | Galvanized | zZ       | 1,363                     | 828                           | SupplierStandard | 704               |
| 104103806070149 | 38                  | 1,960                                 | Bright     | zZ       | 1,363                     | 828                           | SupplierStandard | 704               |
| 104103805070149 | 38                  | 1,960                                 | Bright     | sS       | 1,363                     | 828                           | SupplierStandard | 704               |
| 104103805270149 | 38                  | 1,960                                 | Galvanized | sS       | 1,363                     | 828                           | SupplierStandard | 704               |
| 104103803070149 | 38                  | 1,960                                 | Bright     | zS       | 1,363                     | 828                           | SupplierStandard | 704               |
| 104103803270149 | 38                  | 1,960                                 | Galvanized | zS       | 1,363                     | 828                           | SupplierStandard | 704               |
| 104103806300149 | 38                  | 2,160                                 | Galvanized | zZ       | 1,425                     | 828                           | SupplierStandard | 704               |
| 104103806100149 | 38                  | 2,160                                 | Bright     | zZ       | 1,425                     | 828                           | SupplierStandard | 704               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104103805100149 | 38                  | 2,160                                 | Bright     | sS       | 1,425                     | 828                           | SupplierStandard | 704               |
| 104103805300149 | 38                  | 2,160                                 | Galvanized | sS       | 1,425                     | 828                           | SupplierStandard | 704               |
| 104103803100149 | 38                  | 2,160                                 | Bright     | zS       | 1,425                     | 828                           | SupplierStandard | 704               |
| 104103803300149 | 38                  | 2,160                                 | Galvanized | zS       | 1,425                     | 828                           | SupplierStandard | 704               |
| 104104006270149 | 40                  | 1,960                                 | Galvanized | zZ       | 1,510                     | 917                           | SupplierStandard | 780               |
| 104104006070149 | 40                  | 1,960                                 | Bright     | zZ       | 1,510                     | 917                           | SupplierStandard | 780               |
| 104104005070149 | 40                  | 1,960                                 | Bright     | sS       | 1,510                     | 917                           | SupplierStandard | 780               |
| 104104005270149 | 40                  | 1,960                                 | Galvanized | sS       | 1,510                     | 917                           | SupplierStandard | 780               |
| 104104003070149 | 40                  | 1,960                                 | Bright     | zS       | 1,510                     | 917                           | SupplierStandard | 780               |
| 104104003270149 | 40                  | 1,960                                 | Galvanized | zS       | 1,510                     | 917                           | SupplierStandard | 780               |
| 104104006300149 | 40                  | 2,160                                 | Galvanized | zZ       | 1,579                     | 917                           | SupplierStandard | 780               |
| 104104006100149 | 40                  | 2,160                                 | Bright     | zZ       | 1,579                     | 917                           | SupplierStandard | 780               |
| 104104005100149 | 40                  | 2,160                                 | Bright     | sS       | 1,579                     | 917                           | SupplierStandard | 780               |
| 104104005300149 | 40                  | 2,160                                 | Galvanized | sS       | 1,579                     | 917                           | SupplierStandard | 780               |
| 104104003100149 | 40                  | 2,160                                 | Bright     | zS       | 1,579                     | 917                           | SupplierStandard | 780               |
| 104104003300149 | 40                  | 2,160                                 | Galvanized | zS       | 1,579                     | 917                           | SupplierStandard | 780               |
| 104104206270149 | 42                  | 1,960                                 | Galvanized | zZ       | 1,665                     | 1,011                         | SupplierStandard | 860               |
| 104104206070149 | 42                  | 1,960                                 | Bright     | zZ       | 1,665                     | 1,011                         | SupplierStandard | 860               |
| 104104205070149 | 42                  | 1,960                                 | Bright     | sS       | 1,665                     | 1,011                         | SupplierStandard | 860               |
| 104104205270149 | 42                  | 1,960                                 | Galvanized | sS       | 1,665                     | 1,011                         | SupplierStandard | 860               |
| 104104203070149 | 42                  | 1,960                                 | Bright     | zS       | 1,665                     | 1,011                         | SupplierStandard | 860               |
| 104104203270149 | 42                  | 1,960                                 | Galvanized | zS       | 1,665                     | 1,011                         | SupplierStandard | 860               |
| 104104206300149 | 42                  | 2,160                                 | Galvanized | zZ       | 1,741                     | 1,011                         | SupplierStandard | 860               |
| 104104206100149 | 42                  | 2,160                                 | Bright     | zZ       | 1,741                     | 1,011                         | SupplierStandard | 860               |
| 104104205100149 | 42                  | 2,160                                 | Bright     | sS       | 1,741                     | 1,011                         | SupplierStandard | 860               |
| 104104205300149 | 42                  | 2,160                                 | Galvanized | sS       | 1,741                     | 1,011                         | SupplierStandard | 860               |
| 104104203100149 | 42                  | 2,160                                 | Bright     | zS       | 1,741                     | 1,011                         | SupplierStandard | 860               |
| 104104203300149 | 42                  | 2,160                                 | Galvanized | zS       | 1,741                     | 1,011                         | SupplierStandard | 860               |
| 104104306270149 | 43                  | 1,960                                 | Galvanized | zZ       | 1,745                     | 1,060                         | SupplierStandard | 901               |
| 104104306070149 | 43                  | 1,960                                 | Bright     | zZ       | 1,745                     | 1,060                         | SupplierStandard | 901               |
| 104104305070149 | 43                  | 1,960                                 | Bright     | sS       | 1,745                     | 1,060                         | SupplierStandard | 901               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104104305270149 | 43                  | 1,960                                 | Galvanized | sS       | 1,745                     | 1,060                         | SupplierStandard | 901               |
| 104104303070149 | 43                  | 1,960                                 | Bright     | zS       | 1,745                     | 1,060                         | SupplierStandard | 901               |
| 104104303270149 | 43                  | 1,960                                 | Galvanized | zS       | 1,745                     | 1,060                         | SupplierStandard | 901               |
| 104104306300149 | 43                  | 2,160                                 | Galvanized | zZ       | 1,825                     | 1,060                         | SupplierStandard | 901               |
| 104104306100149 | 43                  | 2,160                                 | Bright     | zZ       | 1,825                     | 1,060                         | SupplierStandard | 901               |
| 104104305100149 | 43                  | 2,160                                 | Bright     | sS       | 1,825                     | 1,060                         | SupplierStandard | 901               |
| 104104305300149 | 43                  | 2,160                                 | Galvanized | sS       | 1,825                     | 1,060                         | SupplierStandard | 901               |
| 104104303100149 | 43                  | 2,160                                 | Bright     | zS       | 1,825                     | 1,060                         | SupplierStandard | 901               |
| 104104303300149 | 43                  | 2,160                                 | Galvanized | zS       | 1,825                     | 1,060                         | SupplierStandard | 901               |
| 104104406270149 | 44                  | 1,960                                 | Galvanized | zZ       | 1,827                     | 1,110                         | SupplierStandard | 944               |
| 104104406070149 | 44                  | 1,960                                 | Bright     | zZ       | 1,827                     | 1,110                         | SupplierStandard | 944               |
| 104104405070149 | 44                  | 1,960                                 | Bright     | sS       | 1,827                     | 1,110                         | SupplierStandard | 944               |
| 104104405270149 | 44                  | 1,960                                 | Galvanized | sS       | 1,827                     | 1,110                         | SupplierStandard | 944               |
| 104104403070149 | 44                  | 1,960                                 | Bright     | zS       | 1,827                     | 1,110                         | SupplierStandard | 944               |
| 104104403270149 | 44                  | 1,960                                 | Galvanized | zS       | 1,827                     | 1,110                         | SupplierStandard | 944               |
| 104104406300149 | 44                  | 2,160                                 | Galvanized | zZ       | 1,911                     | 1,110                         | SupplierStandard | 944               |
| 104104406100149 | 44                  | 2,160                                 | Bright     | zZ       | 1,911                     | 1,110                         | SupplierStandard | 944               |
| 104104405100149 | 44                  | 2,160                                 | Bright     | sS       | 1,911                     | 1,110                         | SupplierStandard | 944               |
| 104104405300149 | 44                  | 2,160                                 | Galvanized | sS       | 1,911                     | 1,110                         | SupplierStandard | 944               |
| 104104403100149 | 44                  | 2,160                                 | Bright     | zS       | 1,911                     | 1,110                         | SupplierStandard | 944               |
| 104104403300149 | 44                  | 2,160                                 | Galvanized | zS       | 1,911                     | 1,110                         | SupplierStandard | 944               |
| 104104506270149 | 45                  | 1,960                                 | Galvanized | zZ       | 1,911                     | 1,161                         | SupplierStandard | 987               |
| 104104506070149 | 45                  | 1,960                                 | Bright     | zZ       | 1,911                     | 1,161                         | SupplierStandard | 987               |
| 104104505070149 | 45                  | 1,960                                 | Bright     | sS       | 1,911                     | 1,161                         | SupplierStandard | 987               |
| 104104505270149 | 45                  | 1,960                                 | Galvanized | sS       | 1,911                     | 1,161                         | SupplierStandard | 987               |
| 104104503070149 | 45                  | 1,960                                 | Bright     | zS       | 1,911                     | 1,161                         | SupplierStandard | 987               |
| 104104503270149 | 45                  | 1,960                                 | Galvanized | zS       | 1,911                     | 1,161                         | SupplierStandard | 987               |
| 104104506300149 | 45                  | 2,160                                 | Galvanized | zZ       | 1,999                     | 1,161                         | SupplierStandard | 987               |
| 104104506100149 | 45                  | 2,160                                 | Bright     | zZ       | 1,999                     | 1,161                         | SupplierStandard | 987               |
| 104104505100149 | 45                  | 2,160                                 | Bright     | sS       | 1,999                     | 1,161                         | SupplierStandard | 987               |
| 104104505300149 | 45                  | 2,160                                 | Galvanized | sS       | 1,999                     | 1,161                         | SupplierStandard | 987               |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104104503100149 | 45                  | 2,160                                 | Bright     | zS       | 1,999                     | 1,161                         | SupplierStandard | 987               |
| 104104503300149 | 45                  | 2,160                                 | Galvanized | zS       | 1,999                     | 1,161                         | SupplierStandard | 987               |
| 104104606270149 | 46                  | 1,960                                 | Galvanized | zZ       | 1,997                     | 1,213                         | SupplierStandard | 1,031             |
| 104104606070149 | 46                  | 1,960                                 | Bright     | zZ       | 1,997                     | 1,213                         | SupplierStandard | 1,031             |
| 104104605070149 | 46                  | 1,960                                 | Bright     | sS       | 1,997                     | 1,213                         | SupplierStandard | 1,031             |
| 104104605270149 | 46                  | 1,960                                 | Galvanized | sS       | 1,997                     | 1,213                         | SupplierStandard | 1,031             |
| 104104603070149 | 46                  | 1,960                                 | Bright     | zS       | 1,997                     | 1,213                         | SupplierStandard | 1,031             |
| 104104603270149 | 46                  | 1,960                                 | Galvanized | zS       | 1,997                     | 1,213                         | SupplierStandard | 1,031             |
| 104104606300149 | 46                  | 2,160                                 | Galvanized | zZ       | 2,089                     | 1,213                         | SupplierStandard | 1,031             |
| 104104606100149 | 46                  | 2,160                                 | Bright     | zZ       | 2,089                     | 1,213                         | SupplierStandard | 1,031             |
| 104104605100149 | 46                  | 2,160                                 | Bright     | sS       | 2,089                     | 1,213                         | SupplierStandard | 1,031             |
| 104104605300149 | 46                  | 2,160                                 | Galvanized | sS       | 2,089                     | 1,213                         | SupplierStandard | 1,031             |
| 104104603100149 | 46                  | 2,160                                 | Bright     | zS       | 2,089                     | 1,213                         | SupplierStandard | 1,031             |
| 104104603300149 | 46                  | 2,160                                 | Galvanized | zS       | 2,089                     | 1,213                         | SupplierStandard | 1,031             |
| 104104806270149 | 48                  | 1,960                                 | Galvanized | zZ       | 2,175                     | 1,321                         | SupplierStandard | 1,123             |
| 104104806070149 | 48                  | 1,960                                 | Bright     | zZ       | 2,175                     | 1,321                         | SupplierStandard | 1,123             |
| 104104805070149 | 48                  | 1,960                                 | Bright     | sS       | 2,175                     | 1,321                         | SupplierStandard | 1,123             |
| 104104805270149 | 48                  | 1,960                                 | Galvanized | sS       | 2,175                     | 1,321                         | SupplierStandard | 1,123             |
| 104104803070149 | 48                  | 1,960                                 | Bright     | zS       | 2,175                     | 1,321                         | SupplierStandard | 1,123             |
| 104104803270149 | 48                  | 1,960                                 | Galvanized | zS       | 2,175                     | 1,321                         | SupplierStandard | 1,123             |
| 104104806300149 | 48                  | 2,160                                 | Galvanized | zZ       | 2,274                     | 1,321                         | SupplierStandard | 1,123             |
| 104104806100149 | 48                  | 2,160                                 | Bright     | zZ       | 2,274                     | 1,321                         | SupplierStandard | 1,123             |
| 104104805100149 | 48                  | 2,160                                 | Bright     | sS       | 2,274                     | 1,321                         | SupplierStandard | 1,123             |
| 104104805300149 | 48                  | 2,160                                 | Galvanized | sS       | 2,274                     | 1,321                         | SupplierStandard | 1,123             |
| 104104803100149 | 48                  | 2,160                                 | Bright     | zS       | 2,274                     | 1,321                         | SupplierStandard | 1,123             |
| 104104803300149 | 48                  | 2,160                                 | Galvanized | zS       | 2,274                     | 1,321                         | SupplierStandard | 1,123             |
| 104105006270149 | 50                  | 1,960                                 | Galvanized | zZ       | 2,360                     | 1,433                         | SupplierStandard | 1,218             |
| 104105006070149 | 50                  | 1,960                                 | Bright     | zZ       | 2,360                     | 1,433                         | SupplierStandard | 1,218             |
| 104105005070149 | 50                  | 1,960                                 | Bright     | sS       | 2,360                     | 1,433                         | SupplierStandard | 1,218             |
| 104105005270149 | 50                  | 1,960                                 | Galvanized | sS       | 2,360                     | 1,433                         | SupplierStandard | 1,218             |
| 104105003070149 | 50                  | 1,960                                 | Bright     | zS       | 2,360                     | 1,433                         | SupplierStandard | 1,218             |

## Steel Wire Rope Verotop P

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 104105003270149 | 50                  | 1,960                                 | Galvanized | zS       | 2,360                     | 1,433                         | SupplierStandard | 1,218             |
| 104105006300149 | 50                  | 2,160                                 | Galvanized | zZ       | 2,468                     | 1,433                         | SupplierStandard | 1,218             |
| 104105006100149 | 50                  | 2,160                                 | Bright     | zZ       | 2,468                     | 1,433                         | SupplierStandard | 1,218             |
| 104105005100149 | 50                  | 2,160                                 | Bright     | sS       | 2,468                     | 1,433                         | SupplierStandard | 1,218             |
| 104105005300149 | 50                  | 2,160                                 | Galvanized | sS       | 2,468                     | 1,433                         | SupplierStandard | 1,218             |
| 104105003100149 | 50                  | 2,160                                 | Bright     | zS       | 2,468                     | 1,433                         | SupplierStandard | 1,218             |
| 104105003300149 | 50                  | 2,160                                 | Galvanized | zS       | 2,468                     | 1,433                         | SupplierStandard | 1,218             |
| 104105206270149 | 52                  | 1,960                                 | Galvanized | zZ       | 2,552                     | 1,550                         | SupplierStandard | 1,318             |
| 104105206070149 | 52                  | 1,960                                 | Bright     | zZ       | 2,552                     | 1,550                         | SupplierStandard | 1,318             |
| 104105205070149 | 52                  | 1,960                                 | Bright     | sS       | 2,552                     | 1,550                         | SupplierStandard | 1,318             |
| 104105205270149 | 52                  | 1,960                                 | Galvanized | sS       | 2,552                     | 1,550                         | SupplierStandard | 1,318             |
| 104105203070149 | 52                  | 1,960                                 | Bright     | zS       | 2,552                     | 1,550                         | SupplierStandard | 1,318             |
| 104105203270149 | 52                  | 1,960                                 | Galvanized | zS       | 2,552                     | 1,550                         | SupplierStandard | 1,318             |
| 104105206300149 | 52                  | 2,160                                 | Galvanized | zZ       | 2,669                     | 1,550                         | SupplierStandard | 1,318             |
| 104105206100149 | 52                  | 2,160                                 | Bright     | zZ       | 2,669                     | 1,550                         | SupplierStandard | 1,318             |
| 104105205100149 | 52                  | 2,160                                 | Bright     | sS       | 2,669                     | 1,550                         | SupplierStandard | 1,318             |
| 104105205300149 | 52                  | 2,160                                 | Galvanized | sS       | 2,669                     | 1,550                         | SupplierStandard | 1,318             |
| 104105203100149 | 52                  | 2,160                                 | Bright     | zS       | 2,669                     | 1,550                         | SupplierStandard | 1,318             |
| 104105203300149 | 52                  | 2,160                                 | Galvanized | zS       | 2,669                     | 1,550                         | SupplierStandard | 1,318             |
| 104105406270149 | 54                  | 1,960                                 | Galvanized | zZ       | 2,753                     | 1,671                         | SupplierStandard | 1,421             |
| 104105406070149 | 54                  | 1,960                                 | Bright     | zZ       | 2,753                     | 1,671                         | SupplierStandard | 1,421             |
| 104105405070149 | 54                  | 1,960                                 | Bright     | sS       | 2,753                     | 1,671                         | SupplierStandard | 1,421             |
| 104105405270149 | 54                  | 1,960                                 | Galvanized | sS       | 2,753                     | 1,671                         | SupplierStandard | 1,421             |
| 104105403070149 | 54                  | 1,960                                 | Bright     | zS       | 2,753                     | 1,671                         | SupplierStandard | 1,421             |
| 104105403270149 | 54                  | 1,960                                 | Galvanized | zS       | 2,753                     | 1,671                         | SupplierStandard | 1,421             |
| 104105406300149 | 54                  | 2,160                                 | Galvanized | zZ       | 2,878                     | 1,671                         | SupplierStandard | 1,421             |
| 104105406100149 | 54                  | 2,160                                 | Bright     | zZ       | 2,878                     | 1,671                         | SupplierStandard | 1,421             |
| 104105405100149 | 54                  | 2,160                                 | Bright     | sS       | 2,878                     | 1,671                         | SupplierStandard | 1,421             |
| 104105405300149 | 54                  | 2,160                                 | Galvanized | sS       | 2,878                     | 1,671                         | SupplierStandard | 1,421             |
| 104105403100149 | 54                  | 2,160                                 | Bright     | zS       | 2,878                     | 1,671                         | SupplierStandard | 1,421             |
| 104105403300149 | 54                  | 2,160                                 | Galvanized | zS       | 2,878                     | 1,671                         | SupplierStandard | 1,421             |

## Steel Wire Rope Verotop P

---