


## Trulift 8F

### Product information

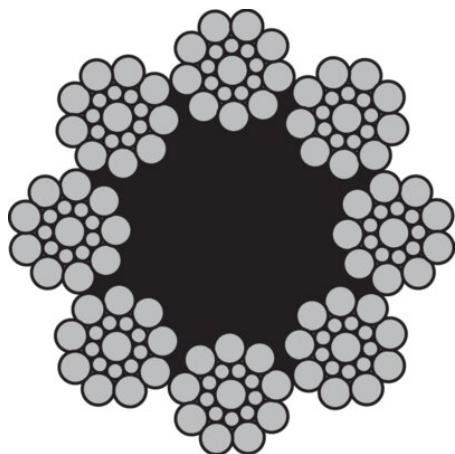

Also available in Filler (12/6&6F/1) and Warrington (6&6/6/1) constructions.  
Excellent stretch characteristics.

... [Read more](#)

**Features:** High quality eight strand fibre core lift rope.

**Marking:** According to standard


**Finish:** Ungalvanised.

**Standard:** EN 12385-5

**Fill factor:** 0.44

**Tolerance Ø:** 0% to +6%

Elevator



## Trulift 8F

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|--------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 106100804130079 | 8                   | 1,370/1,770                           | Bright | sZ       | 28.1                      | 22                            | SupplierStandard | 22.2              |
| 106100904130079 | 9                   | 1,370/1,770                           | Bright | sZ       | 35.6                      | 28.3                          | SupplierStandard | 28                |
| 106101004130079 | 10                  | 1,370/1,770                           | Bright | sZ       | 44                        | 34.9                          | SupplierStandard | 34                |
| 106101104130079 | 11                  | 1,370/1,770                           | Bright | sZ       | 53.2                      | 42.2                          | SupplierStandard | 41                |
| 106101204130079 | 12                  | 1,370/1,770                           | Bright | sZ       | 63.3                      | 50.3                          | SupplierStandard | 49                |
| 106101304130079 | 13                  | 1,370/1,770                           | Bright | sZ       | 74.3                      | 59                            | SupplierStandard | 58                |
| 106101404130079 | 14                  | 1,370/1,770                           | Bright | sZ       | 86.1                      | 68.4                          | SupplierStandard | 67                |
| 106101504130079 | 15                  | 1,370/1,770                           | Bright | sZ       | 98.9                      | 78.5                          | SupplierStandard | 77                |
| 106101604130079 | 16                  | 1,370/1,770                           | Bright | sZ       | 113                       | 89.3                          | SupplierStandard | 87                |
| 106101904130079 | 19                  | 1,370/1,770                           | Bright | sZ       | 159                       | 126                           | SupplierStandard | 123               |
| 106102204130079 | 22                  | 1,370/1,770                           | Bright | sZ       | 213                       | 169                           | SupplierStandard | 165               |