

Alloy Swivel Bearing Hoist Hook 8-175N

Product information



Built with ball bearing and enables full swivel feature under load. At least 25% greater WLL than traditional Grade 8 products. Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL. Magnaflux crack detection is performed 100% on each batch
[... Read more](#)

Material: Quenched and Tempered Alloy Steel.

Marking: According to standard

Temperature range: Tempering temperature minimum 400°C


Standard: EN 1677-1

Safety factor: 4:1

Grade: 10

Alloy Swivel Bearing Hoist Hook 8-175N

Blueprint

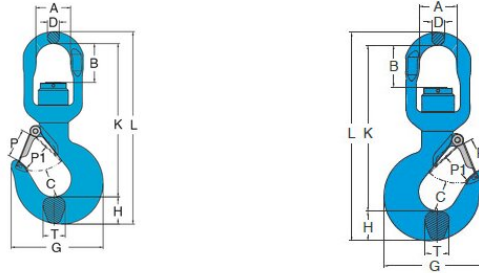

Technical data

Part code	Chain diameter mm	WLL ton	Type	A mm	B mm	C mm	D mm	G mm	H mm	K mm	L mm	P mm	P1 mm	T mm	Weight kg
420500200660	7-8	2	CC	36	29	26	13	91	25	143	181	24	20	22	0.9
420502200660	28	22	JJ	123	116	71	51	277	76	469	599	86	81	68	33.5