Vertical Lifting Clamp IPU10S

Product information



The Crosby IPU10S vertical lifting clamp is designed for lifting, turning and transferring stainless steel plates, sheets and fabrications. Its universal hinged hoisting eye allows lifting from different directions without side-loading the clamp, while the 180° turning range supports controlled repositioning between horizontal and vertical orientations. Available with Working Load Limits (WLL) from 0.5 to 9 tonnes, depending on the selected size.

Best used for:

- Vertical lifting and handling of stainless steel plates, sheets and fabricated components.
- Turning stainless steel loads through 180° in workshops and industrial material handling operations.

Product benefits:

- Universal hinged hoisting eye accommodates different lifting directions and multi-leg sling configurations.
- Lock-open and lock-closed latch enables pretensioning and controlled load release.
- Welded alloy steel body and forged components provide strength in a compact design.
- Individually proof tested to twice the WLL, with certification supplied.
- Individual serialization and included test certificate support traceability and inspection documentation.

... *Read more*

Material: Alloy Steel. Pivot & cam stainless steel
Marking: According to standard, CE-mark, WLL, Logo, Type, Jaw opening, Serial number, Proof load test date
Temperature range: -40°C (-40°F) up to +100°C (+212°F)
Standard: EN 13155
Warning: A minimum load of 10% of the WLL is required.

© November 2026 - All Rights Reserved

Vertical Lifting Clamp IPU10S

Blueprint

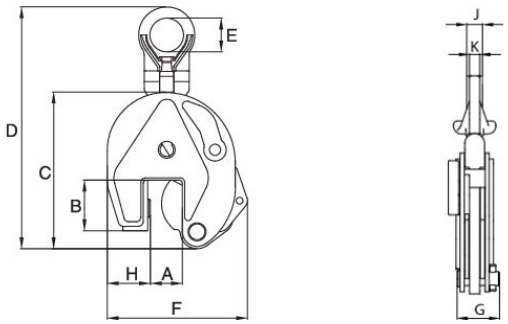

Technical data

Part code	WLL ton	Jaw width mm	Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	J mm	Weight kg
502100050160340	0.5	0-16	0.5-IPU10S	0-16	44	130	216	40	115	42	28	11	-	1.9
502100100200340	1	0-20	1-IPU10S	0-20	45	139	225	40	127	42	38	11	-	2.4
502100200350340	2	0-35	2-IPU10S	0-35	78	201	368	70	188	64	55	16	-	8.5
502100300400340	3	0-40	3-IPU10S	0-40	100	253	436	75	222	78	60	20	-	14.8
502100450400340	4.5	0-40	4.5-IPU10S	0-40	100	253	436	75	227	82	65	20	-	16
502100600500340	6	0-50	6-IPU10S	0-50	126	302	525	80	292	84	95	20	44	24
502100900500340	9	0-50	9-IPU10S	0-50	126	325	552	80	310	94	104	20	44	29.5

© November 2026 - All Rights Reserved