


Oversize Clevis Master Set Pewag L XKW

Product information

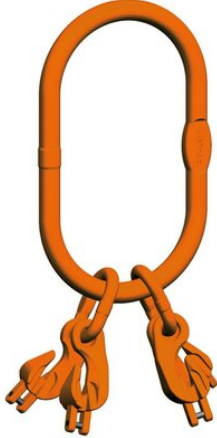

This high-grade clevis master set was designed for the creation of IV-leg chain slings in the assembled system. The benefits of this system are obvious: the chain can simply be mounted directly in the captive coupling of the shortening element, thereby eliminating the need for an additional connecting link.

The hook functions both as a connecting link and a shortening element and the master link is suitable for crane hooks up to no. 25 according to DIN 15401 and up to no. 32 according to DIN 15402.

Because of its large master ring, it is frequently used on mobile cranes that must withstand multiple loads.

[... Read more](#)

Material: High duty grade 10.

Marking: According to standard, CE-marked, Pewag or PW, winner or 10, H16, batch code and type.

Temperature range: -40°C up to +380°C.

Finish: Orange powder coated.


Standard: EN 818-4

Safety factor: 4:1

Grade: 10

Oversize Clevis Master Set Pewag LXKW

Blueprint



Technical data

Part code	Code	WLL ton	EWL mm	Use for hook DIN 15401 Nr	Double hook DIN 15402 no.	d mm	e mm	t mm	w mm mm	Weight kg
402100300650	LXKW 4-6	3	478	25	32	23	478	340	180	4.38
402100530650	LXKW 4-8	5.3	532	25	32	27	532	340	180	7.71
402100800650	LXKW 4-10	8	584	25	32	33	584	340	180	12.88
402101400650	LXKW 4-13	14	659	25	32	40	659	340	180	24.37
402102120650	LXKW 4-16	21.2	713	25	32	40	713	340	180	34.53