Clevis Master Pewag Set VMXKW 2

Product information

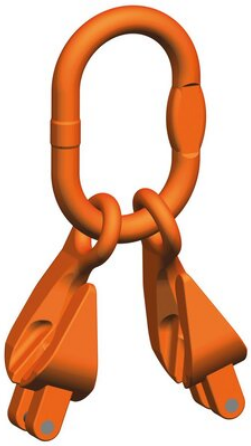

VMXKW Clevis master sets are designed for the assembly of 2-leg chain slings with welded-in XKW shortening element.
Master sets with welded-in XKW shortening element.

... *Read more*

Marking: According to standard, CE-mark
Temperature range: -40ºC up to +380°C.
Finish: Orange powder coated.
Standard: EN 818-4

Safety factor: 4:1
Grade: 10

© November 2026 - All Rights Reserved

Clevis Master Pewag Set VMXKW 2

Blueprint



Technical data

Part code	Code	Chain diameter mm	WLL ton	EWL mm	WLL 0-45° ton	Use for hook DIN 15401 Nr	Double hook DIN 15402 no.	d mm	t mm	w mm mm	s mm	t1 mm mm	Weight kg
402100141240	VMXKW 2-5/6	6	1.4	204	2	4	5	14	120	70	10	84	1.04
402100191240	VMXKW 2-7	7	1.9	262	2.65	5	6	16	140	80	13	122	1.91
402100251240	VMXKW 2-8	8	2.5	282	3.55	6	8	19	160	95	14	122	2.35
402100401240	VMXKW 2-10	10	4	331	5.6	10	12	23	170	105	17	161	4.19
402100671240	VMXKW 2-13	13	6.7	393	9.5	10	12	27	190	110	20	203	8.05
402101001240	VMXKW 2-16	16	10	465	14	12	16	33	230	130	26	235	14.38

© November 2026 - All Rights Reserved