# Clevis Shackles Pewag KSCHW

## Product information

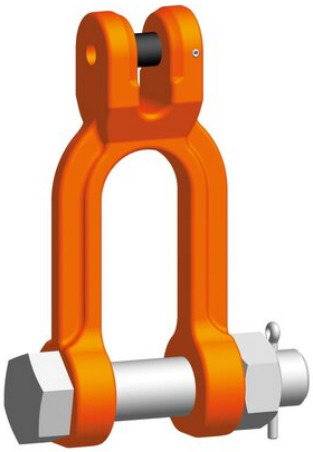

KSCHW Clevis shackles are designed for the assembling of chain slings. They are used as end fittings or suspension elements in chain slings.
Directly attached to the chain. Allows direct connection with other components such as spreader beams.

... *Read more*

**Material:** High duty grade 10.
**Marking:** According to standard, CE-mark, Pewag or PW, winner or 10, H16, batch code and type.
**Temperature range:** -40ºC up to +380°C.
**Finish:** Orange powder coated.
**Standard:** EN 1677-1

**Safety factor:** 4:1
**Grade:** 10

© November 2026 - All Rights Reserved

# Clevis Shackles Pewag KSCHW

## Blueprint




## Technical data

| Part code | Code | WLL ton | EWL mm | a mm | b min. mm | c mm | d mm | d1 mm | e mm | e1 mm mm | Weight kg |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 420100190550 | KSCHW 7/X | 1.9 | 76 | 12 | 26 | 31 | 9 | 16 | 76 | 54 | 0.64 |
| 420100250550 | KSCHW 8/X | 2.5 | 76 | 12 | 26 | 31 | 10 | 16 | 76 | 54 | 0.66 |
| 420100400550 | KSCHW 10/X | 4 | 105 | 16 | 32 | 39 | 12 | 20 | 105 | 76 | 1.22 |
| 420100670550 | KSCHW 13/X | 6.7 | 113 | 21 | 42 | 50 | 16 | 24 | 113 | 77 | 2.64 |

© November 2026 - All Rights Reserved