Master Link Assembly Pewag VMW Enlarged

Product information

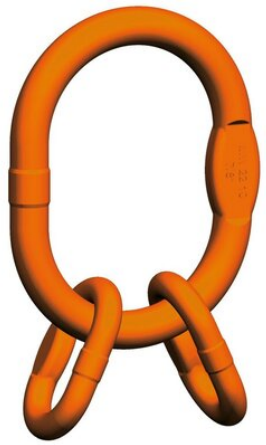

VMW Enlarged master link assemblies are designed for pewag connex and welded system. For assembling 3- and 4-leg chains with connex links CW. For assembling of welded chain slings with BW by pewag. Similar to VW 4-leg set, but also suitable for larger crane hooks and special hooks.

... *Read more*

Material: High duty grade 10.
Marking: According to standard, CE-mark, Pewag or PW, winner or 10, H16, batch code and type.
Temperature range: -40ºC up to +380°C.
Finish: Orange powder coated.
Standard: EN 1677-4

Safety factor: 4:1
Grade: 10

© November 2026 - All Rights Reserved

Master Link Assembly Pewag VMW Enlarged

Blueprint



Technical data

Part code	Code	WLL ton	EWL mm	Consisting of	Use for hook DIN 15401 Nr	Double hook DIN 15402 no.	e mm	t mm	w mm mm	Weight kg
402100420320	VMW 6	4.2	214	MW 18 + 2 BW 13	6	8	214	160	95	1.43
402100660320	VMW 7/8	6.6	240	MW 22 + 2 BW 16	10	12	240	170	105	2.46
402101010320	VMW 10	10.1	275	MW 26 + 2 BW 20	10	12	275	190	110	4.01
402101570320	VMW 13	15.7	345	MW 32 + 2 BW 22	12	16	345	230	130	7.1
402102120320	VMW 16	21.2	415	MW 36 + 2 BW 26	20	25	415	275	150	11.3
402103410320	VMW 19/20	34.1	500	MW 56 + 2 BW 32	50	63	500	350	250	28.3
402104000320	VMW 22	40	520	MW 56 + 2 BW 36	50	63	520	350	250	30.22

© November 2026 - All Rights Reserved